



| Model Name | | | | |
|------------------------------|---|-----------|-----------|-----------|
| Description | U-215XTx3 | U-215XTx4 | U-215DTx3 | U-215DTx4 |
| Product Type | True Flat Series Plastic LCD monitor | | | |
| Chassis Type | Plastic chassis (ABS) with 100 x 100 mm VESA mount | | | |
| Enhanced Chassis | N/A | | | |
| Glass / Touch Panel | Optional: Projective capacitive touch (USB interface) / Glass | | | |
| LCD Panel Spec | 21.5" LED backlight | | | |
| Panel Resolution | 1920 x 1080 pixels | | | |
| Active Screen Area | 476.064 x 267.786 mm | | | |
| Color Depth | 16.7M colors | | | |
| Brightness / Contrast | 250 nits / 1000 :1 | | | |
| Viewing Angle (Typ.) | 178°(H) / 178°(V) | | | |
| Support Resolution | 640 x 480 800 x 600 | | | |

| | | | | |
|-----------------------------|---|--|---|--|
| | 1024 x 768 1280 x 1024 1360 x 768 1680 x 1050 1920 x 1080 | | | |
| I/O Port | D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack (ϕ = 2.0mm) | D-Sub (VGA) DP 1.2 HDMI 1.4a Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket | D-Sub (VGA) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) DC Jack (ϕ = 2.0mm) | D-Sub (VGA) DVI Audio in(3.5mm Phone Jack) USB 2.0 Type B (Touch)(Optional) AC Socket |
| Audio | Optional: 2.5W (8 Ω) speaker x 2 | | | |
| Power | External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A | Internal power adapter, AC IN: 100 ~ 240V ;50/60Hz | External power adapter, AC IN: 100 ~ 240V ;50/60Hz DC OUT: 12V / 5A | Internal power adapter, AC IN: 100 ~ 40V ;50/60Hz |
| Power Consumption | Max. 19.1 W | | | |
| Accessory (Optional) | VGA cable DP cable HDMI cable Audio cable USB cable Adapter | VGA cable DP cable HDMI cable Audio cable USB cable Power cable, CD | VGA cable DVI cable Audio cable USB cable Adapter Power cable, CD | VGA cable DVI cable Audio cable USB cable Power cable, CD |

| | |
|---------------------------------|---|
| | Power cable, CD |
| Dimension | Main body : 525.3(W) 378(H) 180(D) mm |
| | Packing : 575(W) 475(H) 259(D) mm |
| Net Weight (Reference) | 5.9 kg |
| Gross Weight (Reference) | 7.5 kg |
| Temperature Range | Operating : 5 ~ 40°C / Storage : -10 ~ 60°C |
| Humidity Range | Operating : 20 ~ 80% / Storage : 10 ~ 90% |
| EMC / Safety | IEC62368 / CE / FCC, RoHS / REACH |



duraTOUCH[®]
The only all-weather touch




SALES CONTACT

sales@uico.com
630.592.4400
www.uico.com

CORPORATE HEADQUARTERS

Elmhurst, IL USA 60126

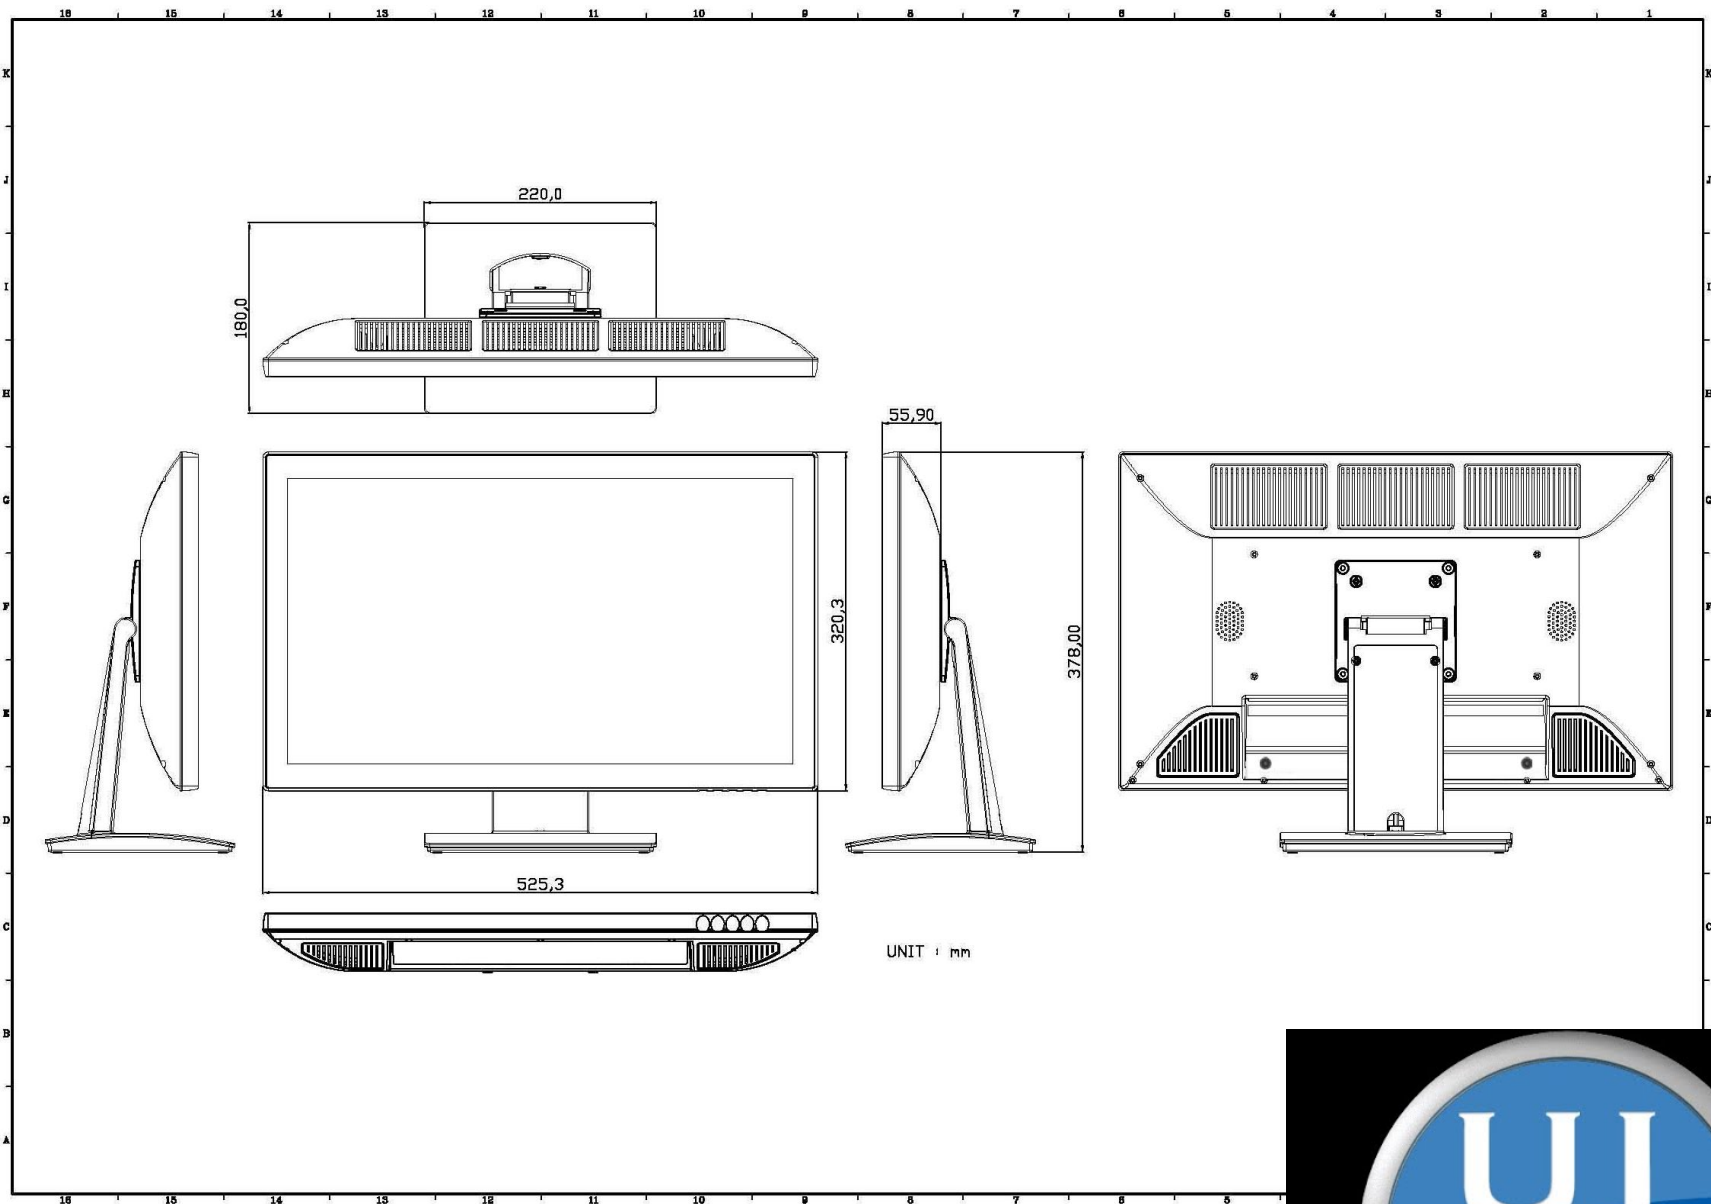

duraTOUCH[®]
The only all-weather touch

sales@uico.com
630.592.4400
www.uico.com

